

Series HPS-SAH, HPS-SAK, HPS-DAH, HPS-DAH/S, HPS-DAK, HPS-DAK/S Manual Non-Coded Pull Station



HPS-SAH



HPS-SAK



HPS-DAH



HPS-DAH/S



HPS-DAK



HPS-DAK/S

STANDARD FEATURES

- Metal Construction
- Enclosed switch with glass rod (included)
- 10 Amps @ 120 VAC
- Available in: Single Action, Dual Action and Dual Action in Spanish (HPS-DAH/S)
- UL, CSFM Listed
- Made in USA

DESCRIPTION

Hochiki America's Models HPS series pull stations are available in six models:

- HPS-SAH - single action with Hex lock
- HPS-SAK - single action with Key lock
- HPS-DAH - dual action with Hex lock
- HPS-DAH/S - dual action with Hex lock (Spanish)
- HPS-DAK - dual action with Key lock
- HPS-DAK/S - dual action with Key lock (Spanish)

Each model is constructed of a solid die cast housing and comes in glossy red. The back switch plate is plated steel. The electrical switch is rated for 10 Amps @ 120 VDC normally open contact rating. All models are connected via terminal block connections.

PRODUCT LISTINGS


SIGNALING




California State
Fire Marshal
7150-0410:162

Series HPS-SAH, HPS-SAK, HPS-DAH, HPS-DAH/S, HPS-DAK, HPS-DAK/S Manual Non-Coded Pull Station

Rear View

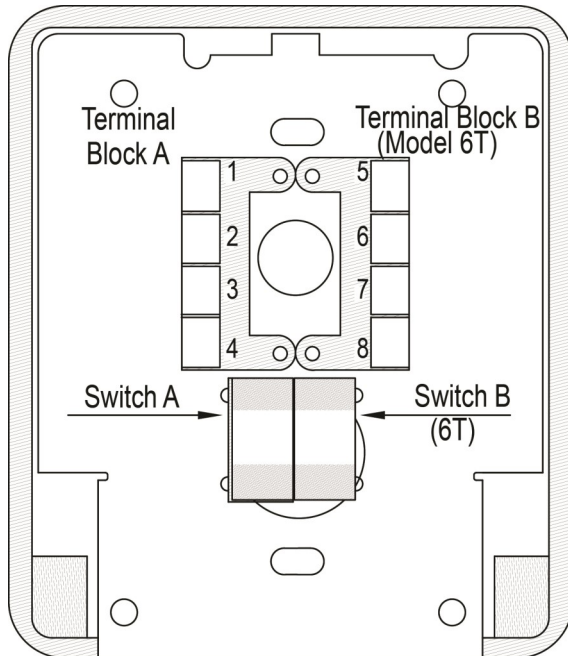

Front View

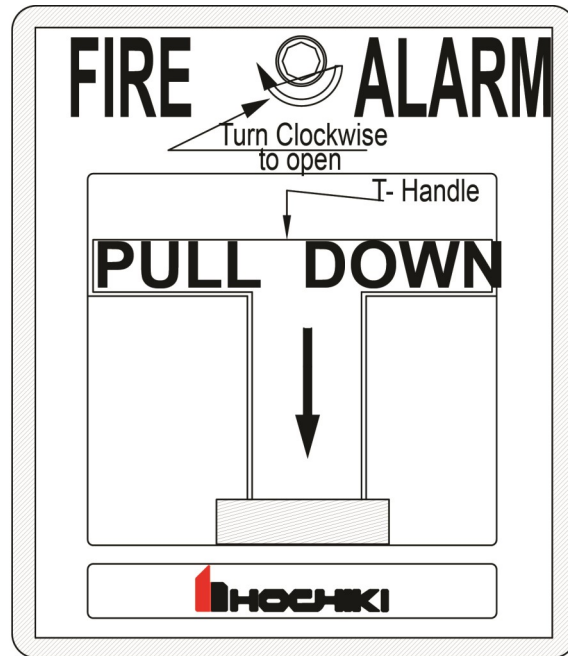

SPECIFICATION

| | | |
|--------------------------------|----------------------------------|------------------------------|
| Model | SAH, SAK, DAH, DAH/S, DAK, DAK/S | EXP./WTP. PRF |
| Contact | SPST Form "A" | DPDT Form "C" |
| Terminal Block | A | A & B |
| Terminal Connecting | 2 & 3 | 1, 2, 3, 5, 6, 7 |
| Terminal Connection LED | 1 (+) & 4 (-) | 4 (+) & 8(-) |
| Terminal Connection Switch | 1 & 4 | 4 & 8 |
| Terminal Connection Phone Jack | 1 & 4 | 4 & 8 |
| Contact Rating | 10A @ 120 VAC | 10A @ 120 VAC |
| Operating Temperature | -30°F (-35°C) ~ 150°F (66°C) | -30°F (-35°C) ~ 150°F (66°C) |
| Dimensions | HPS-SAH_SAK | 3.2"W x 4.75"H x .875"D |
| | HPS-DAH_DAH-S | 3.325"W x 4.75"H x 1.625"D |
| | HPS-DAK_DAK-S | 3.325"W x 4.75"H x 1.625"D |

ELECTRICAL WIRING

